


- Rated voltage(v):85 to 265v Ac,50/60Hz
- TURNS RATIO:N1:N2=1:1
- Insulation resistance:100mΩ min at 500DC
- Test Frequency Response: 10KHz 100Mv
- Operating temperature range: -40°C+150°C
- Temperature Rise: 50°C MAX



CONFIGLRATIONS & DIMENSIONS (unit in mm)

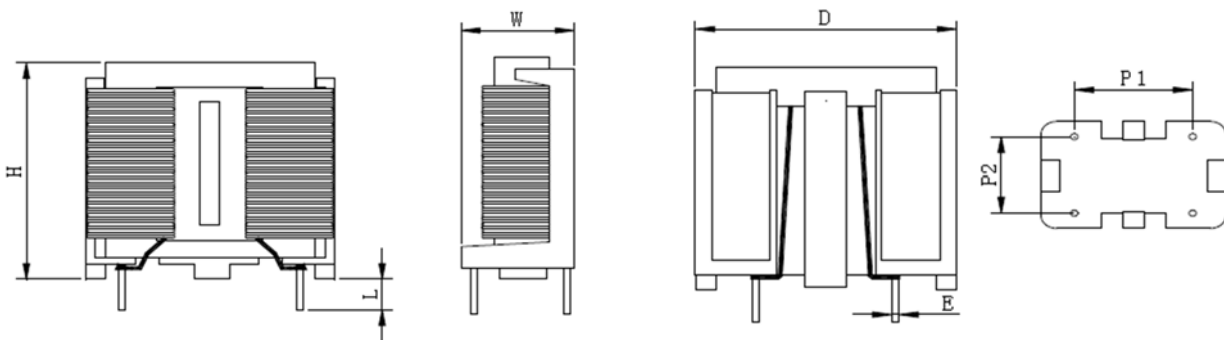

特需規格和要求可按客戶要求定做

型号	电感范围(mH) 1kHz 0.25V	线径规格(mm)	外形尺寸 W*D*H*L(MAX)	P1 排距(mm)	P2 间距(mm)	电流(A)	功率(W)
YL-SQ1212 立式	10mH~30mH	0.10*1.00	12*18*18*3.5	8mm	7mm	0.5-1.2A	45W (MAX)
		0.13*1.00					
		0.13*1.20					

型号	电感范围(mH) 1kHz 0.25V	线径规格(mm)	外形尺寸 W*D*H*L(MAX)	P1 排距(mm)	P2 间距(mm)	电流(A)	功率(W)
YL-SQ1515 立式	5mH~40mH	0.10*1.00	15*22*14*3.5	12.8mm	10mm	0.5-1.8A	65W (MAX)
		0.13*1.00		10.0mm	7.5mm		
		0.13*1.20		8mm	9mm		
		0.15*1.0		10.0mm	6.5mm		
		0.18*1.0					
		0.18*1.2					

型号	电感范围(mH) 1kHz 0.25V	线径规格(mm)	外形尺寸 W*D*H*L(MAX)	P1 排距(mm)	P2 间距(mm)	电流(A)	功率(W)
YL-SQ1918 立式	5mH~35mH	0.13*1.20	15*24*26*4.0	13mm	10mm	0.5-2.5A	180W (MAX)
		0.15*1.0					
		0.18*1.0					
		0.18*1.2					
		0.20*1.0					
		0.20*1.5					

型号	电感范围(mH) 1kHz 0.25V	线径规格(mm)	外形尺寸 W*D*H*L(MAX)	P1 排距(mm)	P2 间距(mm)	电流(A)	功率(W)
YL-SQ2418 立式	5mH~20mH	0.18*1.0	16*25*32*4.0	4+8+4(横排)		0.5-4.0A	280W (MAX)
		0.18*1.2					
		0.20*1.0					
		0.3*1.5					
		0.6*1.0					
		0.20*1.5					